




GSW Light

ESG

VSG

ALU

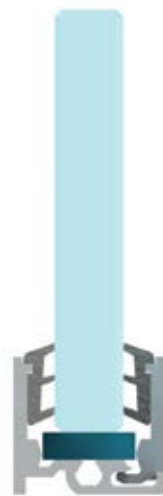



The supplementation of Glass System offer within the scope of glass walls are the GSW Light profiles. They are typically used for construction of smaller glazing in places where strength requirements are not decisive. The purpose of the product allows the significant reduction in profile sizes.

The profiles GSW Light are available in two versions: uniform and two-piece compound. They are used depending on the assembly capabilities.

Due to the lack of tests the use of profiles require individual project.

Specification


Category of use	not specified
Category of space	not specified
Type of glass	ESG/VSG 8-10,76
Max. height (mm)	not specified
Material/finishing	Anodized aluminium / Powder coated aluminium
Approval document	Individual documentation



GSW Light U



GSW Light UI

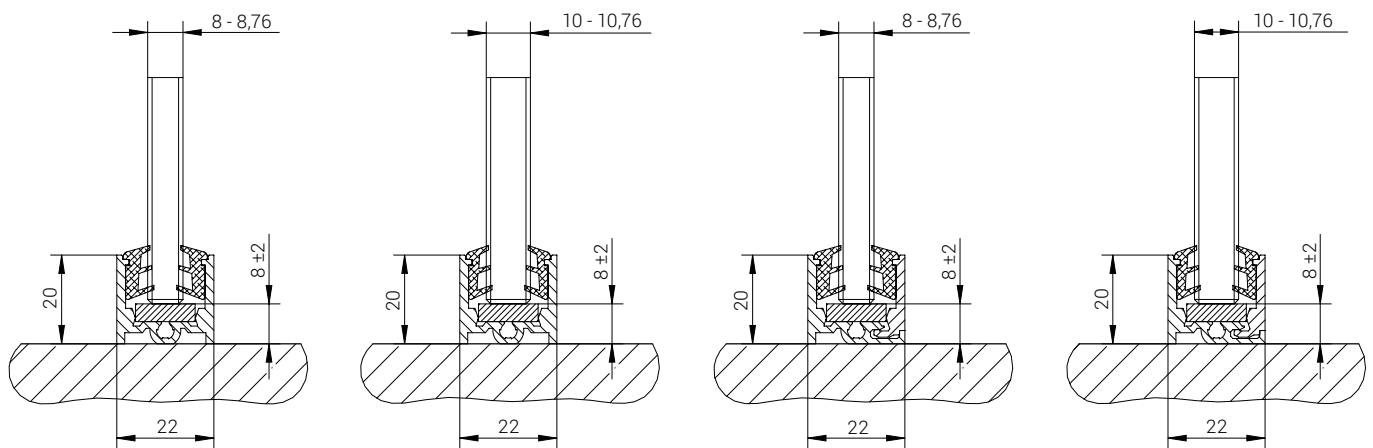

Technical characteristics

- small and lightweight mounting profile 20 mm high,
- convenient and fast assembly of glass structures – the possibility to use the uniform or two-piece compound profile,
- the possibility to use in various types of glass structures, also in combination with other systems.

