

BOX

myo

Woody Box [1]



100% responsable


Eco-conçue
Fabrication française

100% confort

Isolation et correction acoustiques performantes
Lumineuse [2 faces vitrées]
100% de l'air renouvelé toutes les 60 secondes
Eclairage automatique
Une large tablette
Connectique intégrée

100% facile

Livraison & montage rapide
Branchement sur secteur
Bouton d'alimentation générale
Porte avec fermeture mécanique
Brise-vue aimantable

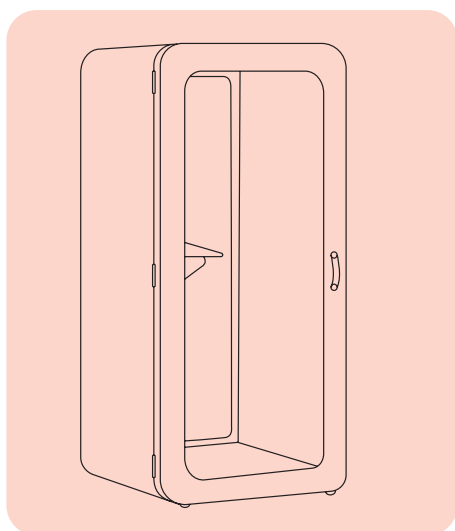

MYO_FP-05.2023

Garantie
2 ANS

Sauf consommable électrique



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100




Since 2023

BOX

Woody Box [1]


myo-solutions.com

Produit
responsable



100%

Fabrication locale

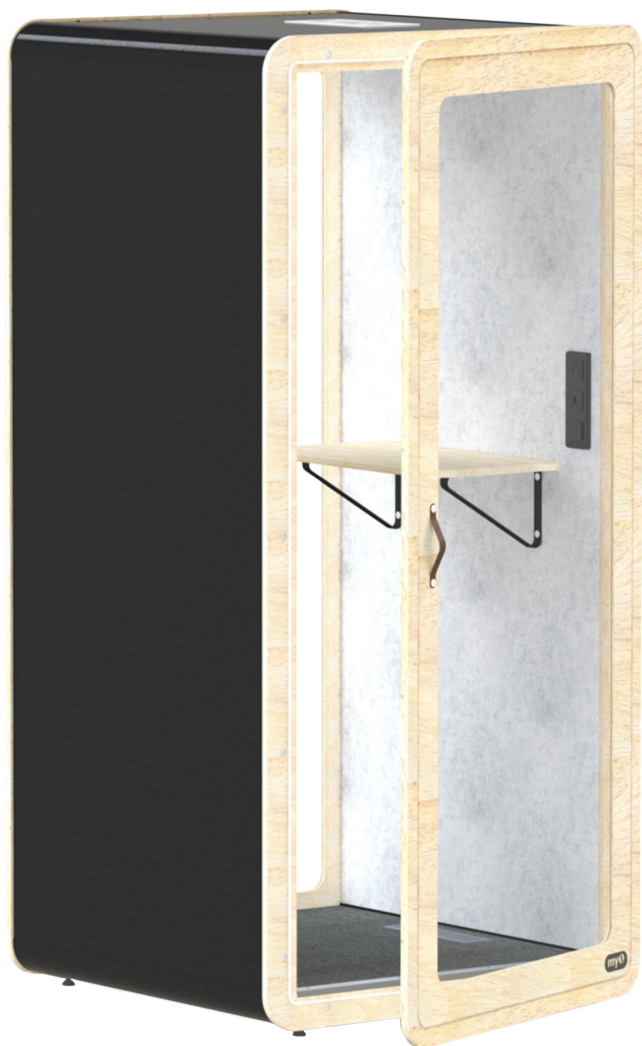

100% recyclable

Vitrage

Structure aluminium

Panneaux extérieurs



Bois

Arbres de seconde vie

Bois Hévéa qui servait initialement à produire du latex. Finition huile de lin.

Utilisés pour les cadres et la tablette.

Cuir

Tannage végétal

Utilisé pour la poignée extérieure.

PET

600 bouteilles recyclées

Utilisées pour fabriquer les panneaux intérieurs.



BOX

Woody Box [1]

myo-solutions.com

Configuration




- 2 faces pleines
- 2 faces vitrées


Ouverture de la porte au choix :

Poussant gauche.

Poussant droit.

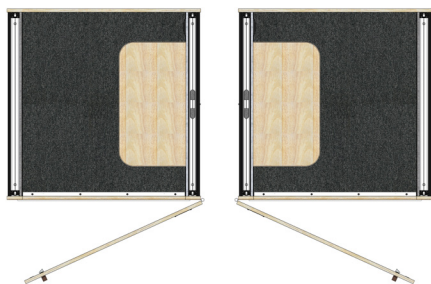

Dimensions

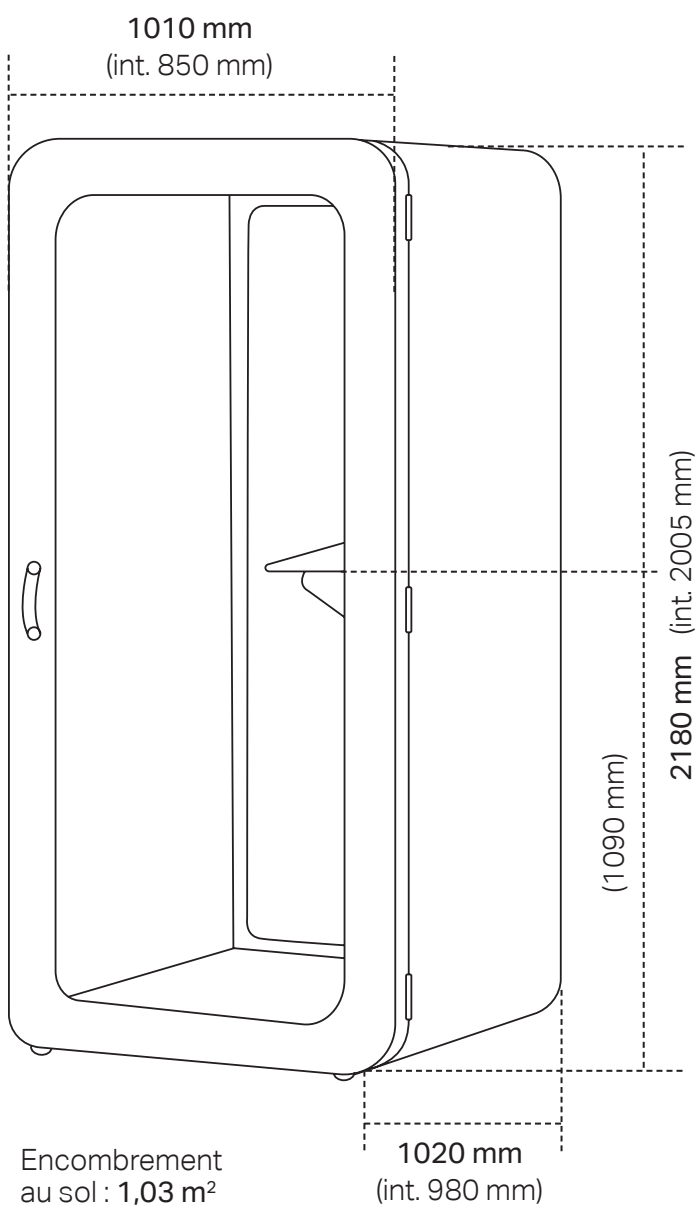

Porte : L.1010 mm x H. 2165 mm

Hauteur de seuil : 100 mm

Tablette de travail : L. 650 mm x P. 350 mm

Epaisseur 18 mm

BOX

Woody Box [1]

myo-solutions.com

Acoustique




Woody Box > Extérieur

-37dB

Tr < 0.30 s

Absorption acoustique

Le temps de réverbération Tr d'un local est le temps au bout duquel le niveau sonore a décru de 60dB lorsque l'on arrête brusquement une source sonore. Il est fonction de la surface d'absorption du local et de son volume (plus le volume du local est petit, plus le Tr devra être faible).

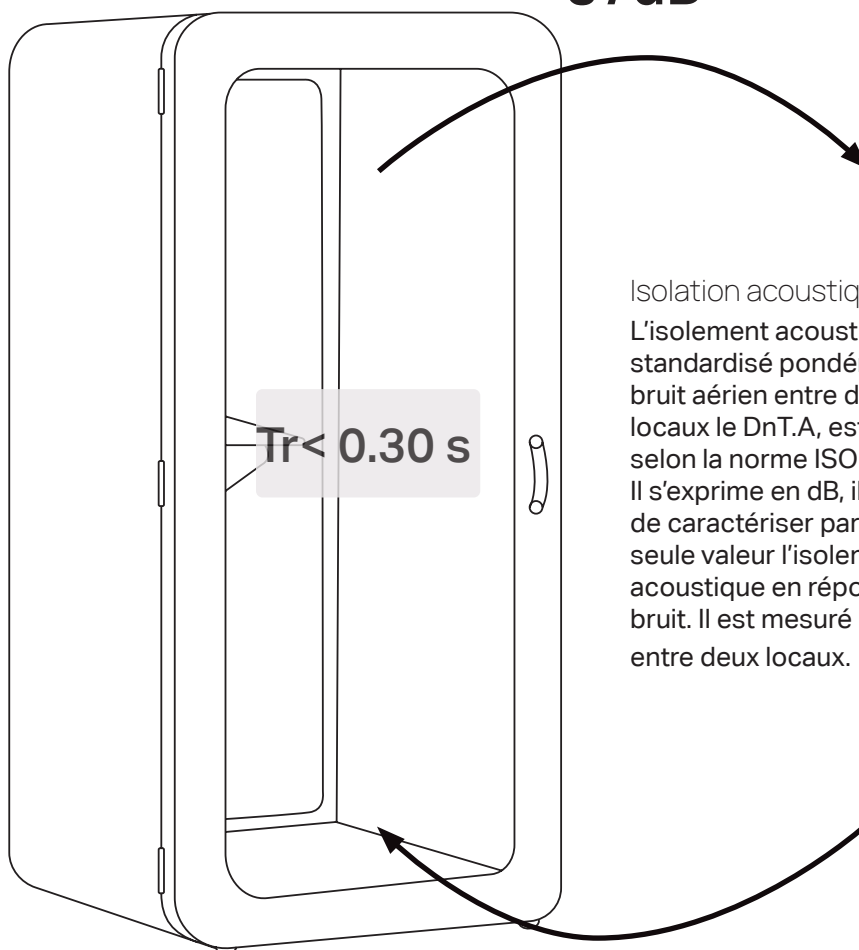

Isolation acoustique

L'isolement acoustique standardisé pondéré au bruit aérien entre deux locaux le DnT.A, est évalué selon la norme ISO 140-4. Il s'exprime en dB, il permet de caractériser par une seule valeur l'isolement acoustique en réponse à un bruit. Il est mesuré in situ entre deux locaux.

Extérieur > Woody Box

-28 dB



BOX

Woody Box [1]

myo-solutions.com

Descriptif technique

Remplissage extérieur plein

Panneaux en Médium stratifiés

2 coloris disponibles: blanc ou noir

Remplissage Intérieur plein

Panneau en fibre de polyester densité supérieure gris clair chiné

Socle bois avec dalles de moquette anthracite

Vérins réglables (planéité)

Remplissage extérieur vitré & Porte 

Cadre en bois véritable, essence Hévéea finition huile de lin

Simple vitrage feuilleté, 33/2



Porte montée sur 3 paumelles avec système de fermeture mécanique

Garnitures de porte



Extérieur
Poignée en cuir souple

Intérieur

Poignée acier coloris blanc ou noir, coordonnée au coloris de la Woody Box



Options

1. Brise-vue à aimanter sur la face arrière

Largeur 1010 mm x Hauteur 2165 mm

Motifs de découpe au choix : triangles ou disques

2. Revêtement tissu intérieur

HUSH 80% polyester 20% viscose : 28 coloris

BOX

Woody Box [1]

myo-solutions.com

Equipements de série

Les coloris des équipements et finitions de la Woody Box sont coordonnés au coloris extérieur choisi, blanc ou noir.

Branchement

Branchement sur secteur (câble 5 m)
Bouton d'alimentation on/off

Eclairage

Spot avec détecteur de présence
1 down-light LED encastré 6W - 540 lumens

Tablette de travail

L. 650 mm x P. 350 mm - Epaisseur 18 mm
Position : 1090 mm du sol
Bois massif, essence hévée finition huile de lin

Connectique électrique

1 prise courant fort + 2 prises USB
Position : 1140 mm du sol

Ventilation

Renouvellement d'air 160 m³/h.

Poids

Livraison en caisse spécifique

Dimensions :

long. 2300 x larg. 800 x haut. 1300 mm

Avec emballage : 215 kg

Sans emballage : 178 kg



Montage

Pour permettre un montage soigné, les produits myO sont livrés avec une notice de montage.



30 mn
2 pers.

BOX

myo

Woody Box [1]



100% responsable


Eco designed
Made in France

100% comfort

High performance acoustic sound insulation and correction
Luminous [2 glazed sides]
Air 100% renewed every 60 secondes
Automatic Lightnings
A large tablet
Integrated electric kits

100% easy

Fast delivery & installation
Mains-power connection
General power button
Door with automatic mechanical closure
Magnetisable view braker

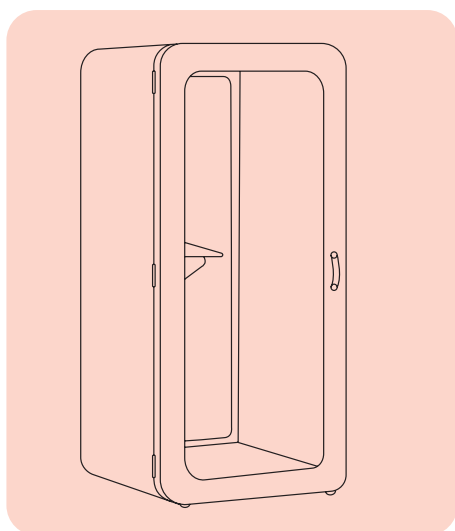

MYO_FP-05.2023

2 YEARS
warranty

Except electrical consumable



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100



Since 2023

BOX

Woody Box [1]

myo-solutions.com

Responsible Product



100% recyclable

Glazings
Aluminium structures
External panels



Wood

Second life threes

Ruber three wood which was originally used to produce latex. Linseed oil finish. Used for Door frame, case and tablet.

Leather

Vegetable-tanned

Used for the outside handle.

PET

600 Recycled bottles

Used to make the interior panels.



BOX

Woody Box [1]

myo-solutions.com

Configuration




- 2 filled up sides
- 2 glazed sides

Choosable opening side of the door:


Left pushing.

Right pushing.

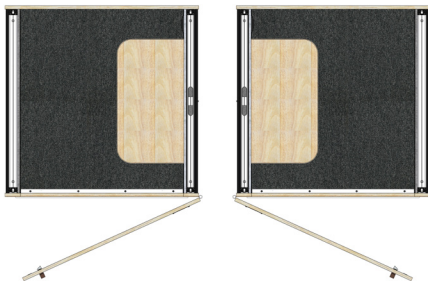

MYO_FP-05.2023

Dimensions

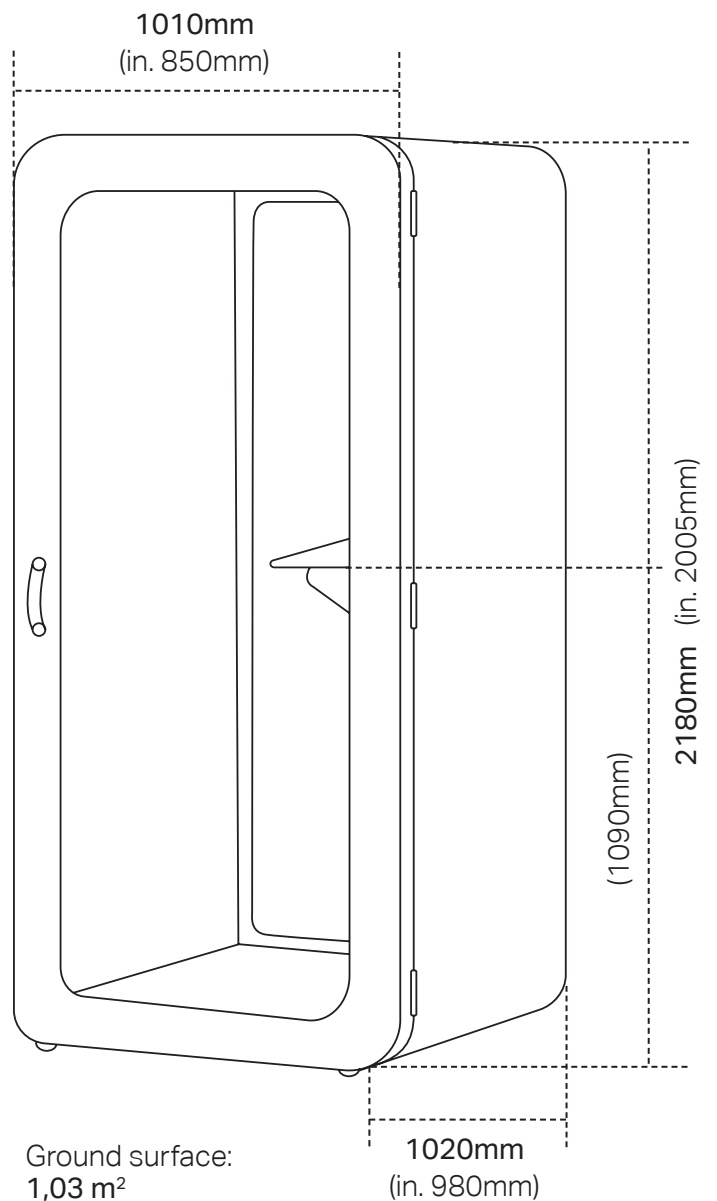

Door: W.1010mm x H. 2165mm

Threfer height: 100mm

Working Tablet: W. 650mm x D. 350mm

Thickness: 18mm

BOX

Woody Box [1]


myo-solutions.com

Acoustic



Woody Box > Outside

-37dB

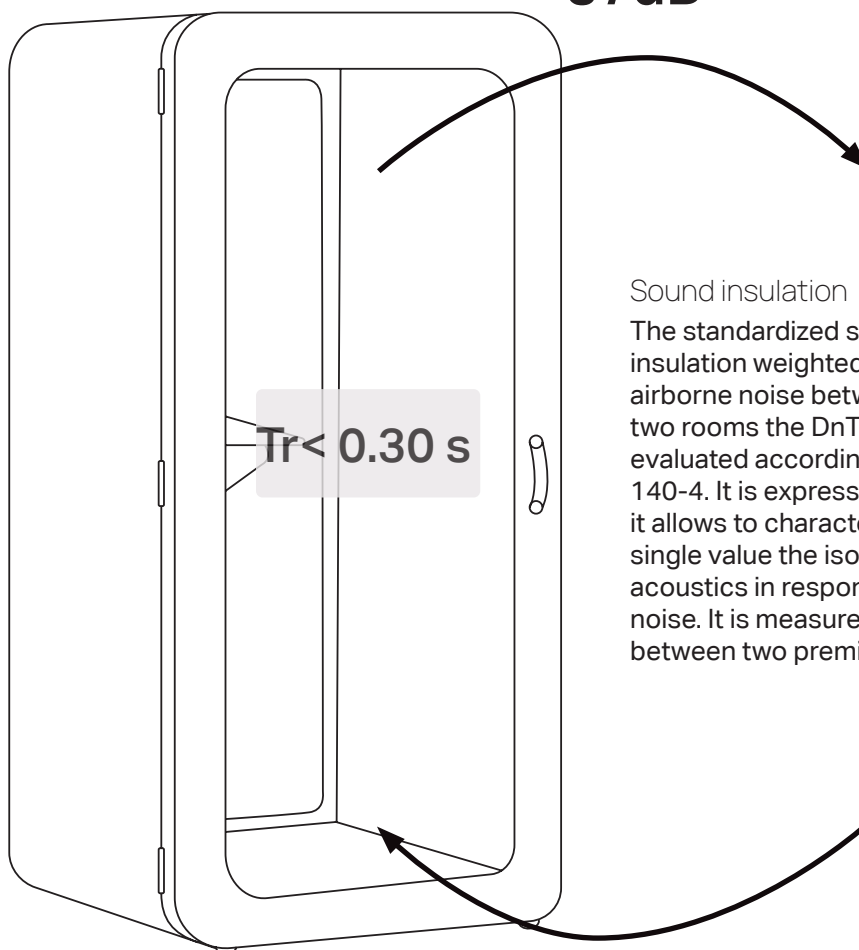

Tr < 0.30 s

Sound absorption

The reverberation time Tr of a room is the time at end of which the sound level has decreased by 60dB

When a sound source is abruptly stopped. It depends on the absorption surface of the room and its volume (the smaller the volume of the room, the lower the Tr should be).

Sound insulation

The standardized sound insulation weighted to airborne noise between two rooms the $DnT.A$, is evaluated according to ISO 140-4. It is expressed in dB, it allows to characterize by a single value the isolation acoustics in response to noise. It is measured in situ between two premises.

Outside > Woody Box

-28 dB



BOX

Woody Box [1]

myo-solutions.com

Technical Specifications

Solid exterior fillings

Laminated Medium Panels,

2 colors available: white or black

Full Inner Filling

Density polyester fiber panel

Upper light grey mottled

Wooden base with anthracite carpet tiles

Adjustable feet (flatness)

Glass exterior filling & Door



Real wood frame, rubber tree species

Linseed oil finish

Single laminated glazing, 33/2



Door mounted on 3 hinges with mechanical closing system.

Door hardware



Exterior Soft leather handle

Inside

Stainless handle in white or black, coordinated with the color of the Woody Box



Options

1. View braker to be magnetized on the back side
Width 1010mm x Height 2165mm
Choice of cutting patterns: triangles or discs

2. Interior coating fabrics
HUSH 80% polyester 20% viscose : 28 colors

BOX

Woody Box [1]

myo-solutions.com

Standard Equipment

The colors of the equipment and finishes of the Woodybox are coordinated with the chosen exterior color, white or black.

Connections

Mains connection (5 m cable)
On/off power button

Lightnings

Spot with sensor detector
1 recessed LED down-light 6W - 540 lumens

Working tablet

W. 650mm x D. 350mm - Thickness: 18mm
Position: 1090mm from the ground
Solid wood, rubber tree finish linseed oil

Electrical Connection

1 strong power outlet + 2 USB sockets
Position: 1140mm from the ground

Ventilation

Air renewal 160 m³/h.

Weight

Specific packaging in wooden crate

Size:

L. 2300 x W. 800 x H. 1300mm

With packaging: 215 kg

Without packaging: 178 kg



Assembly

To allow a careful assembly, myO products are delivered with an assembly manual.



30 mn
2 pers.